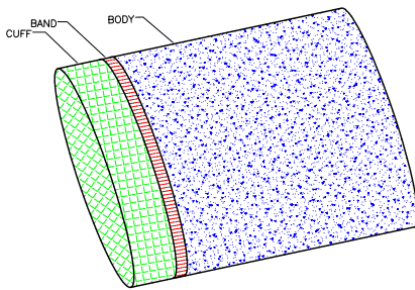


Pillowcase instructions

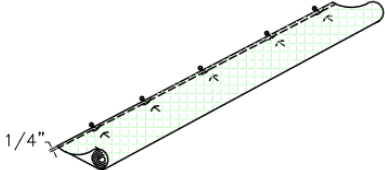
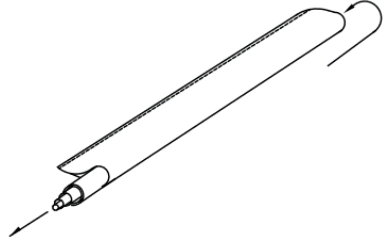
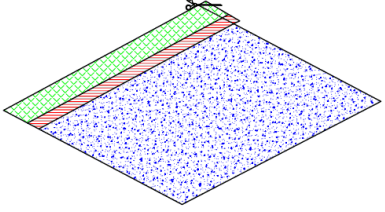
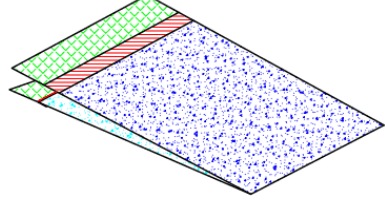
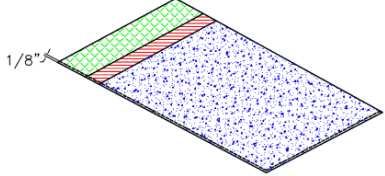
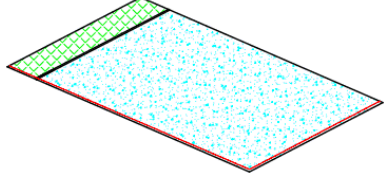
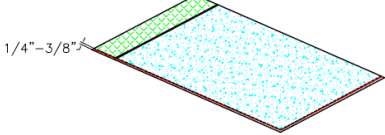
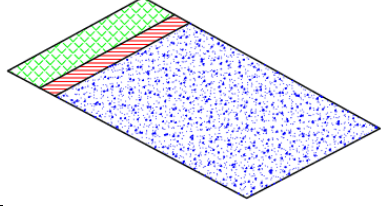


Please note that these pictures were found on the internet. The person who posted them uses 12" of fabric for the cuff, 2 1/2" for the band and 27" for the body of the pillowcase. We use different measurements so please disregard the fabric measurements in the pictures.

Material Requirements:

For the Body 27" by WOF (width of fabric)
 For the Cuff 9" by WOF
 For the Band 3" by WOF

<p>Cut fabric to size as indicated above in the Material Requirements.</p>	
<p>Press band in half lengthwise wrong sides together.</p>	
<p>Optional step but nice to have. Open band, align one raw edge with the top raw edge of the body Stitch band in place just a hair away from the pressing fold on the side closest to the top edge. Refold band so that both raw edges are aligned with the top of the body.</p>	
<p>Lay and pin fabric together as follows aligning raw edges: Cuff right side up Body right side up Band</p>	
<p>Roll body from bottom to halfway up the cuff (or fold the body any way you want just so you can bring the cuff up over the body)</p>	
<p>Roll cuff around the body and pin the raw edge to all the other raw edges. Pin all layers together making sure you don't catch the rolled/folded portion of the body.</p>	

<p>Sew a 1/4" seam along the raw edges.</p> <p>Hint: A walking foot makes this step easier.</p>		
<p>Pull body out of the cuff causing entire cuff to flip right side out.</p>		
<p>Press flat. Fold in half WRONG SIDES TOGETHER and trim selvages to straighten sides.</p> <p>Note: picture has you trim edges first but then you have to do them one at a time instead of one cut for both.</p>		
<p>Sew a 1/4" seam (yes, the picture says 1/8") down the open side and along the bottom. Trim seam to 1/8" inch with either a pinking blade (best option) or a straight blade.</p>		
<p>Press (optional but makes turning easier). Turn wrong side out. Push out all corners and Press (again).</p>		
<p>Sew a 1/4" - 3/8" seam down the same side and along the bottom being careful to encase the previous seam.</p>		
<p>Turn right side out. Push out all corners and Press.</p>		
<p>You are done - Wonderful.</p>	