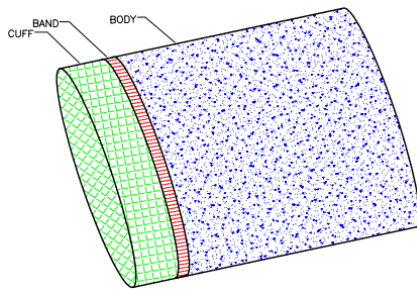


## Pillowcase instructions

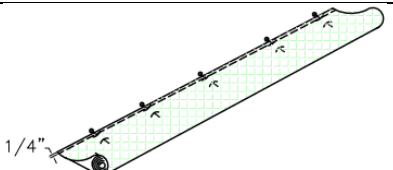
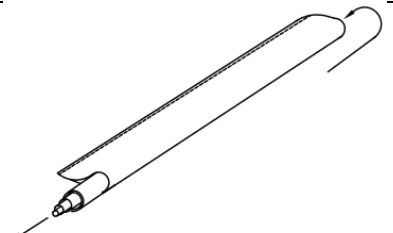
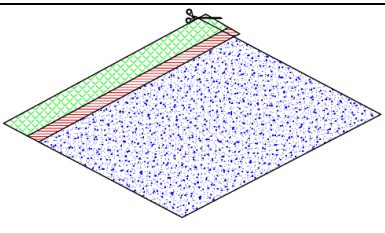
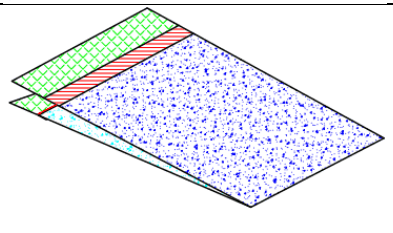
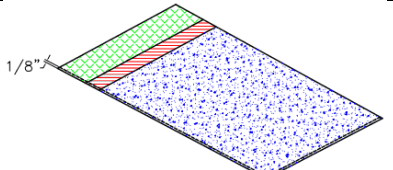
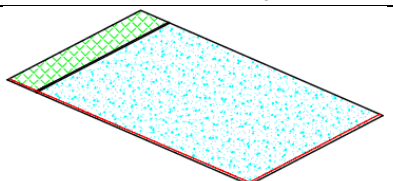
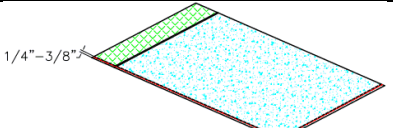
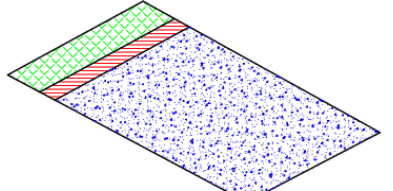


Please note that these pictures were found on the internet. The person who posted them uses 12" of fabric for the cuff, 2 1/2" for the band and 27" for the body of the pillowcase. Acacia Quilt Guild use different measurements so please disregard the fabric measurements in the pictures.

### Material Requirements:

For the Body 27" by WOF (width of fabric)  
 For the Cuff 9" by WOF  
 For the Band 3" by WOF

<p>Cut fabric to size as indicated above in the <b>Material Requirements</b>.</p>	<p>Diagram showing the dimensions for cutting the pillowcase fabric: Cuff (12 inches), Band (2 1/2 inches), and Body (27 inches for standard pillowcase). The full width of fabric is approximately 43 inches.</p>
<p>Press band in half lengthwise wrong sides together.</p>	<p>Diagram showing the band being pressed in half lengthwise.</p>
<p>Optional step but nice to have.          Open band, align one raw edge with the top raw edge of the body          Stitch band in place just a hair away from the pressing fold on the side closest to the top edge.          Refold band so that both raw edges are aligned with the top of the body.</p>	<p>Diagram showing the band being aligned with the top edge of the body.</p>
<p>Lay and pin fabric together as follows aligning raw edges:          Cuff right side up          Body right side up          Band</p>	<p>Diagram showing the cuff, body, and band laid flat and pinned together.</p>
<p>Roll body from bottom to halfway up the cuff (or fold the body any way you want just so you can bring the cuff up over the body)</p>	<p>Diagram showing the body being rolled up towards the cuff.</p>
<p>Roll cuff around the body and pin the raw edge to all the other raw edges. Pin all layers together making sure you don't catch the rolled/folded portion of the body.</p>	<p>Diagram showing the cuff being rolled around the body and pinned.</p>

<p>Sew a 1/4" seam along the raw edges.</p> <p>Hint: A walking foot makes this step easier.</p>		
<p>Pull body out of the cuff causing entire cuff to flip right side out.</p>		
<p>Press flat. Fold in half <b>WRONG SIDES TOGETHER</b> and trim selvages to straighten sides.</p> <p>Note: picture has you trim edges first but then you have to do them one at a time instead of one cut for both.</p>		
<p>Sew a 1/4" seam (yes, the picture says 1/8") down the open side and along the bottom. Trim seam to 1/8" inch with either a pinking blade (best option) or a straight blade.</p>		
<p>Press (optional but makes turning easier). Turn wrong side out. Push out all corners and Press (again).</p>		
<p>Sew a 1/4" - 3/8" seam down the same side and along the bottom being careful to encase the previous seam.</p>		
<p>Turn right side out. Push out all corners and Press.</p>		
<p>You are done - Wonderful.</p>	